


1 11/16"



Uprights shall be square 1 11/16" aluminum extrusions with an 1/8" wall thickness suitable for official 1.55 meters net height at each end. Top of each upright shall include a machined aluminum net top rope guide, and bottom of upright shall have a machined insert that accepts a threaded adjustable urethane foot. Welded upright assembly shall have a white powder coated finish. Net top rope shall fit into the groove in the rope guide, and connect to the upright by means of a rope tensioning cleat. Bottom rope shall tie to bottom rope attachment points on each upper right. Net shall be official 6.1 meter x .76 meters size. System includes net and two uprights. Order optional BM21 for floor sockets with brass cover plate or BM300A, BM350A or BM400A for adapters to install BM10 in existing 3", 3 1/2" or 4" volleyball sockets separately.

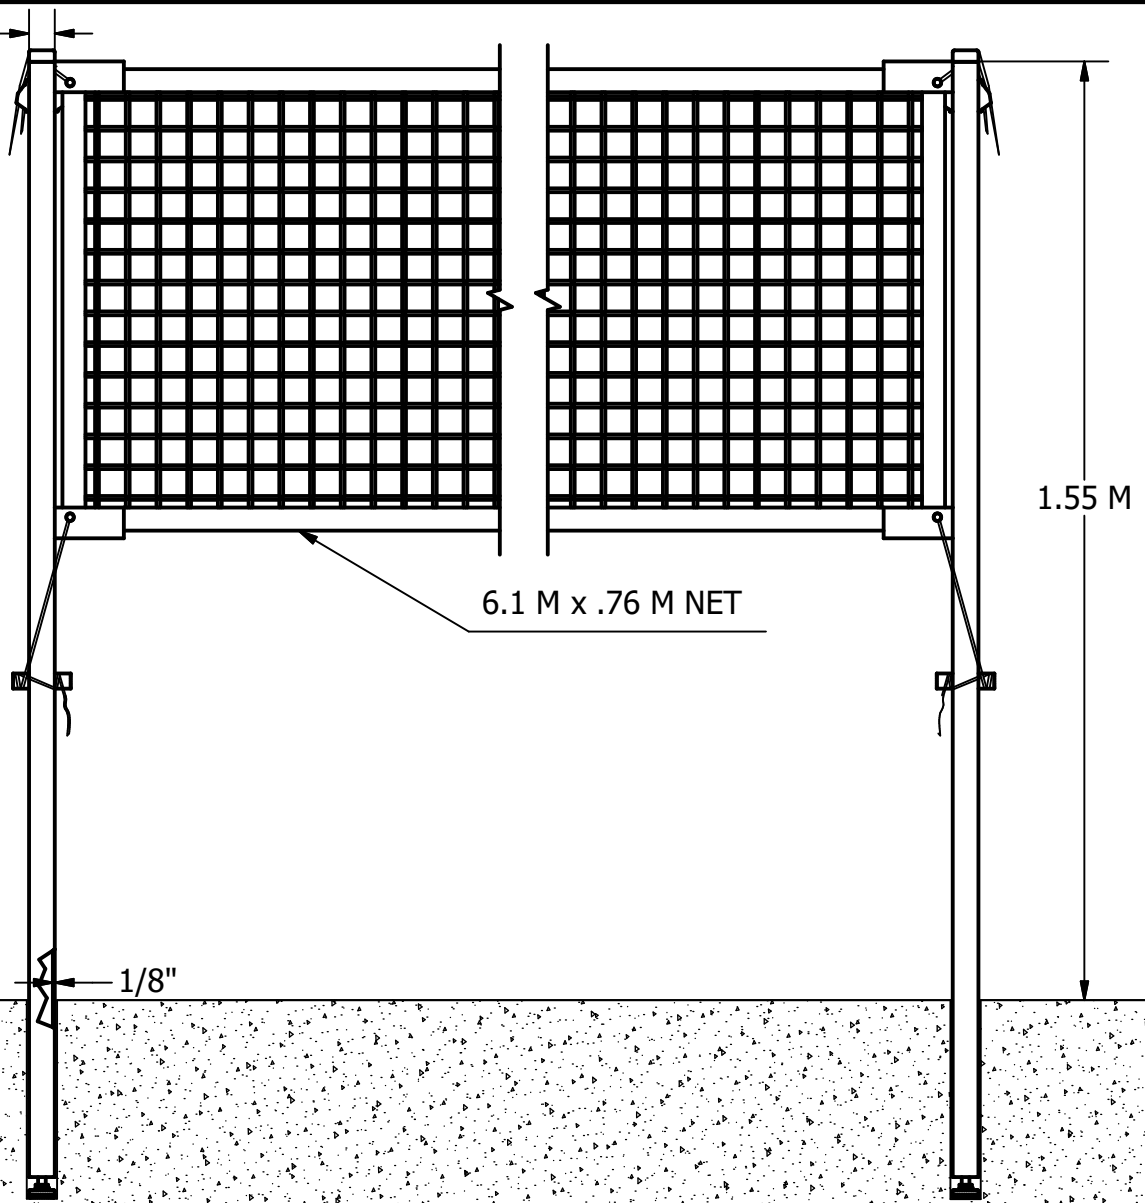

PRODUCT SPECIFICATION

BM10 COMPETITION BADMINTON SYSTEM

REVISED 2/15/2022 L.M